



Part No. 900044  
**DARK LINE POSITION LIGHT** *WHITE*




Part No. 900045  
**DARK LINE POSITION LIGHT** *RED*



Part No. 900046  
**DARK LINE SIDE MARKER** *AMBER*

Mounting details included: Bracket and screws

## FREEDOM DARK LINE POSITION LIGHT / SIDE MARKER

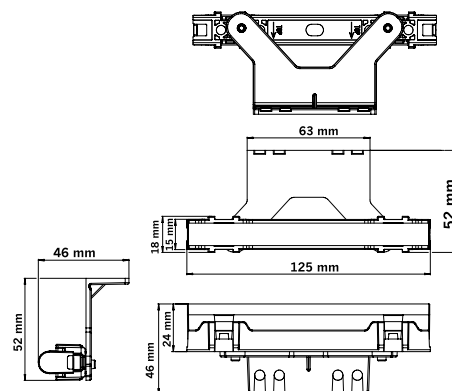

Two additional variants available.  
See Part No: 900041-900043 and 900047-900049

| PART NO.                 | 900044                         | 900045                         | 900046                         |
|--------------------------|--------------------------------|--------------------------------|--------------------------------|
| VOLTAGE                  | 12-24V DC                      | 12-24V DC                      | 12-24V DC                      |
| CONSUMPTION              | 2,5W                           | 3W                             | 3W                             |
| FUNCTIONS                | Front position light           | Rear position light            | Side marker                    |
| COLOR TEMPERATURE        | 5700K                          | -                              | -                              |
| IP-CLASS                 | IP6K9K                         | IP6K9K                         | IP6K9K                         |
| COLOR LENS               | Dark                           | Dark                           | Dark                           |
| COLOR LED                | White                          | Red                            | Amber                          |
| CONNECTION               | Cable                          | Cable                          | Cable                          |
| CABLE LENGTH             | 400 mm                         | 400 mm                         | 400 mm                         |
| MATERIAL HOUSING         | Polypropylene                  | Polypropylene                  | Polypropylene                  |
| MATERIAL LENS            | Polycarbonate                  | Polycarbonate                  | Polycarbonate                  |
| LENGTH                   | 125 mm                         | 125 mm                         | 125 mm                         |
| DEPTH                    | 24 mm                          | 24 mm                          | 24 mm                          |
| HEIGHT                   | 15 mm                          | 15 mm                          | 15 mm                          |
| HEIGHT INCLUDING BRACKET | 52 mm                          | 52 mm                          | 52 mm                          |
| CC                       | Refer to the technical drawing | Refer to the technical drawing | Refer to the technical drawing |
| OPERATING TEMPERATURE    | -40 · +40°C                    | -40 · +40°C                    | -40 · +40°C                    |
| E-APPROVED               | ECE R148                       | ECE R148                       | ECE R148                       |
| EMC-CERTIFICATES         | ECE R10                        | ECE R10                        | ECE R10                        |